


SK5TR

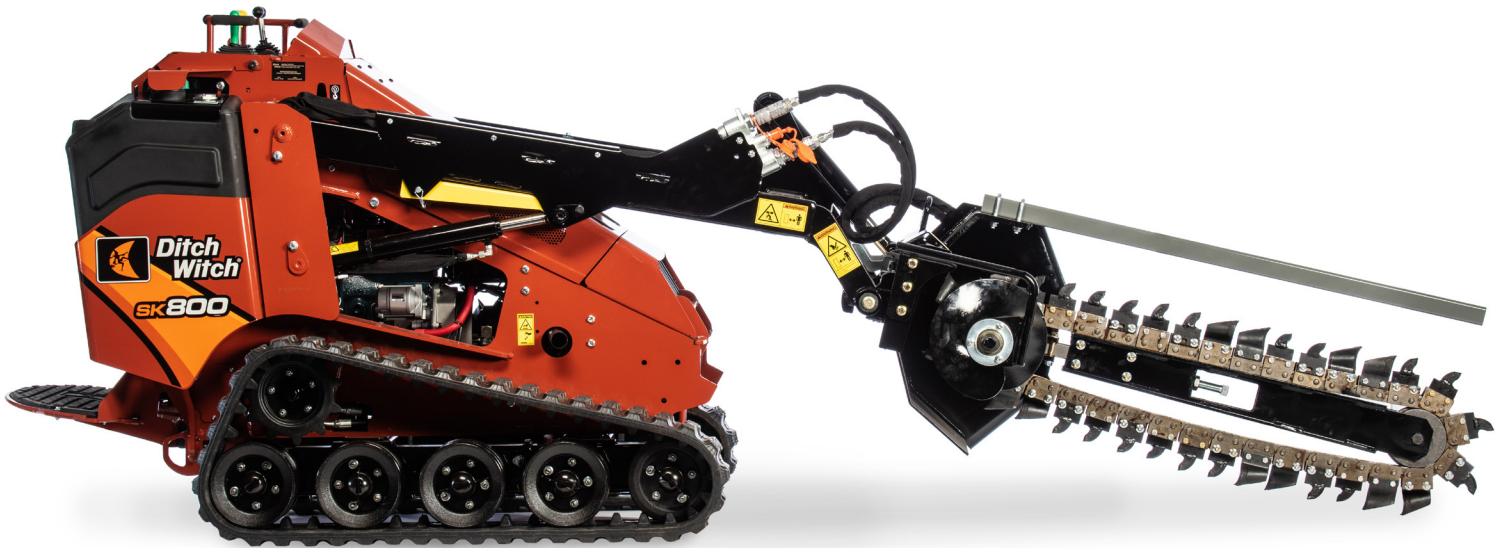

KEY FEATURES/BENEFITS

IMPROVED OPERATOR VISIBILITY

With an updated and more compact design, the SK5TR allows for greater visibility, which increases productivity.

LOWER PRICE POINT

The SK5TR is not only a performance-minded attachment, it's also budget-conscious, delivering even better ROI for operators.


REPLACEABLE BOOM STUB

This updated design feature allows operators to easily replace boom stubs, reducing both downtime and repair cost.

11-TOOTH FORGED SPROCKET

An upgrade from the previous 10-tooth forged sprocket allows for faster chain speeds and helps increase chain life.

SK5TR
ATTACHMENT

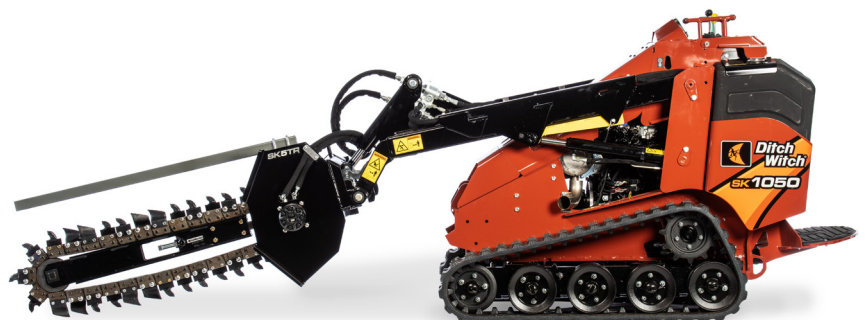

SK5TR SPECIFICATIONS

DIMENSIONS

		U.S.	METRIC
A	Trench Depth (max)	38 in	965 mm
B	Trench Width (max)	6 in	152 mm
C	Boom Travel Down	Vertical	Vertical
C1	Boom Travel Up	5°	5°
	Width	28.7	729 mm
E1	Centerline to Edge	12.4 in	315 mm
E	Centerline to Edge	16.3 in	414 mm
F1	Headshaft Height (Boom Down)	6.5 in	165 mm
	Weight (36" Boom, 4" Shark Chain)	436 lb	198 kg

	SK1050	SK755	SK800; SK752; SK600
	14 GPM	14 GPM	12 GPM
	3500 psi	3000 psi	3000 psi

CHAIN SPEED @ MAX FLOW/PRESSURE

11.9 in ³ Motor (Medium)	309 FPM	323 FPM	267 FPM
14.5 in ³ Motor (Low)	251 FPM	264 FPM	220 FPM

Specifications are general and subject to change without notice. If exact measurements are required, equipment should be weighed and measured. Due to selected options, delivered equipment may not necessarily match that shown.

