



FEATURES & BENEFITS

PRODUCTIVITY Creates trenches up to 1.5-in wide and 12-in deep that are ideal for power and fiber-optic installation, allowing you to save time and money by installing cable with minimal disruption to the surrounding infrastructure.

FLEXIBILITY Allows for hydraulic adjustments of the blade for added flexibility, extending the cut depth range from 0" to 12" and with manual traversing, you can place the saw on left, right, or center of the plate for more adaptability across different jobsites.

DURABLE BLADES Can be equipped with a wide variety of unique blades that have been designed to cut a clean, narrow trench in one pass. Options range from Conical blades to Ditch Witch-exclusive PDC blades with diamond-embedded carbide.


SUPERIOR SYSTEM Part of a complete microtrenching system that includes a construction-grade lineup of Stand-On Skid Steers and the HX75 Vacuum Excavator. This allencompassing system helps reduce labor expenses and brings an unbeatable efficiency to any jobsite.

INDUSTRY LEADING DESIGN With an integrated "push or pull" design for street crossing, the attachment eliminates the need to remove the saw from the ground for more efficient, quick cuts, and minimal ground disturbance for a better-looking finish.



DIMENSIONS (STD)	U.S.	METRIC
Trencher depth, max	12 in	305 mm
Trencher depth, min	2 in	51 mm
Trench width	0.5-1.5 in	13-38 mm
Outside to center	12 in	305 mm
Outside to center	47 in	1.2 m
Height	46.2 in	1.2 m
Length	59 in	1.5 m
Width	59 in	1.5 m
Attachment mass, no blade	1102.5 lb	500 kg
Blade diameter	34 in	864 mm
Blade speed	150 rpm	150 rpm
Saw motor displacement	24.7 in ³	405 cc
MT122 preferred flow	16 gpm (SK1550)	60.5 lpm (SK1550)
MT124 preferred flow	22 gpm (SK3000)	83.2 lpm (SK3000)

Specifications are general and subject to change without notice. If exact measurements are required, equipment should be weighed and measured. Due to selected options, delivered equipment may not necessarily match that shown.

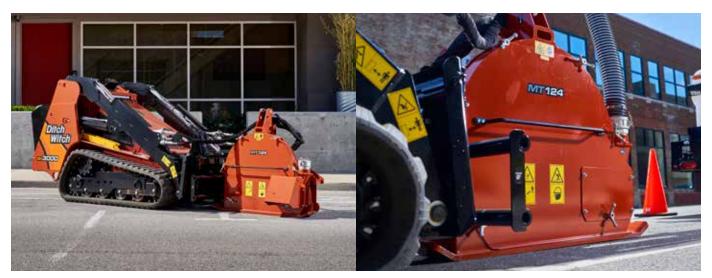

©2021 The Charles Machine Works, Inc.

LFCMWPR0D1128403